



P Export : " Imperviousness"

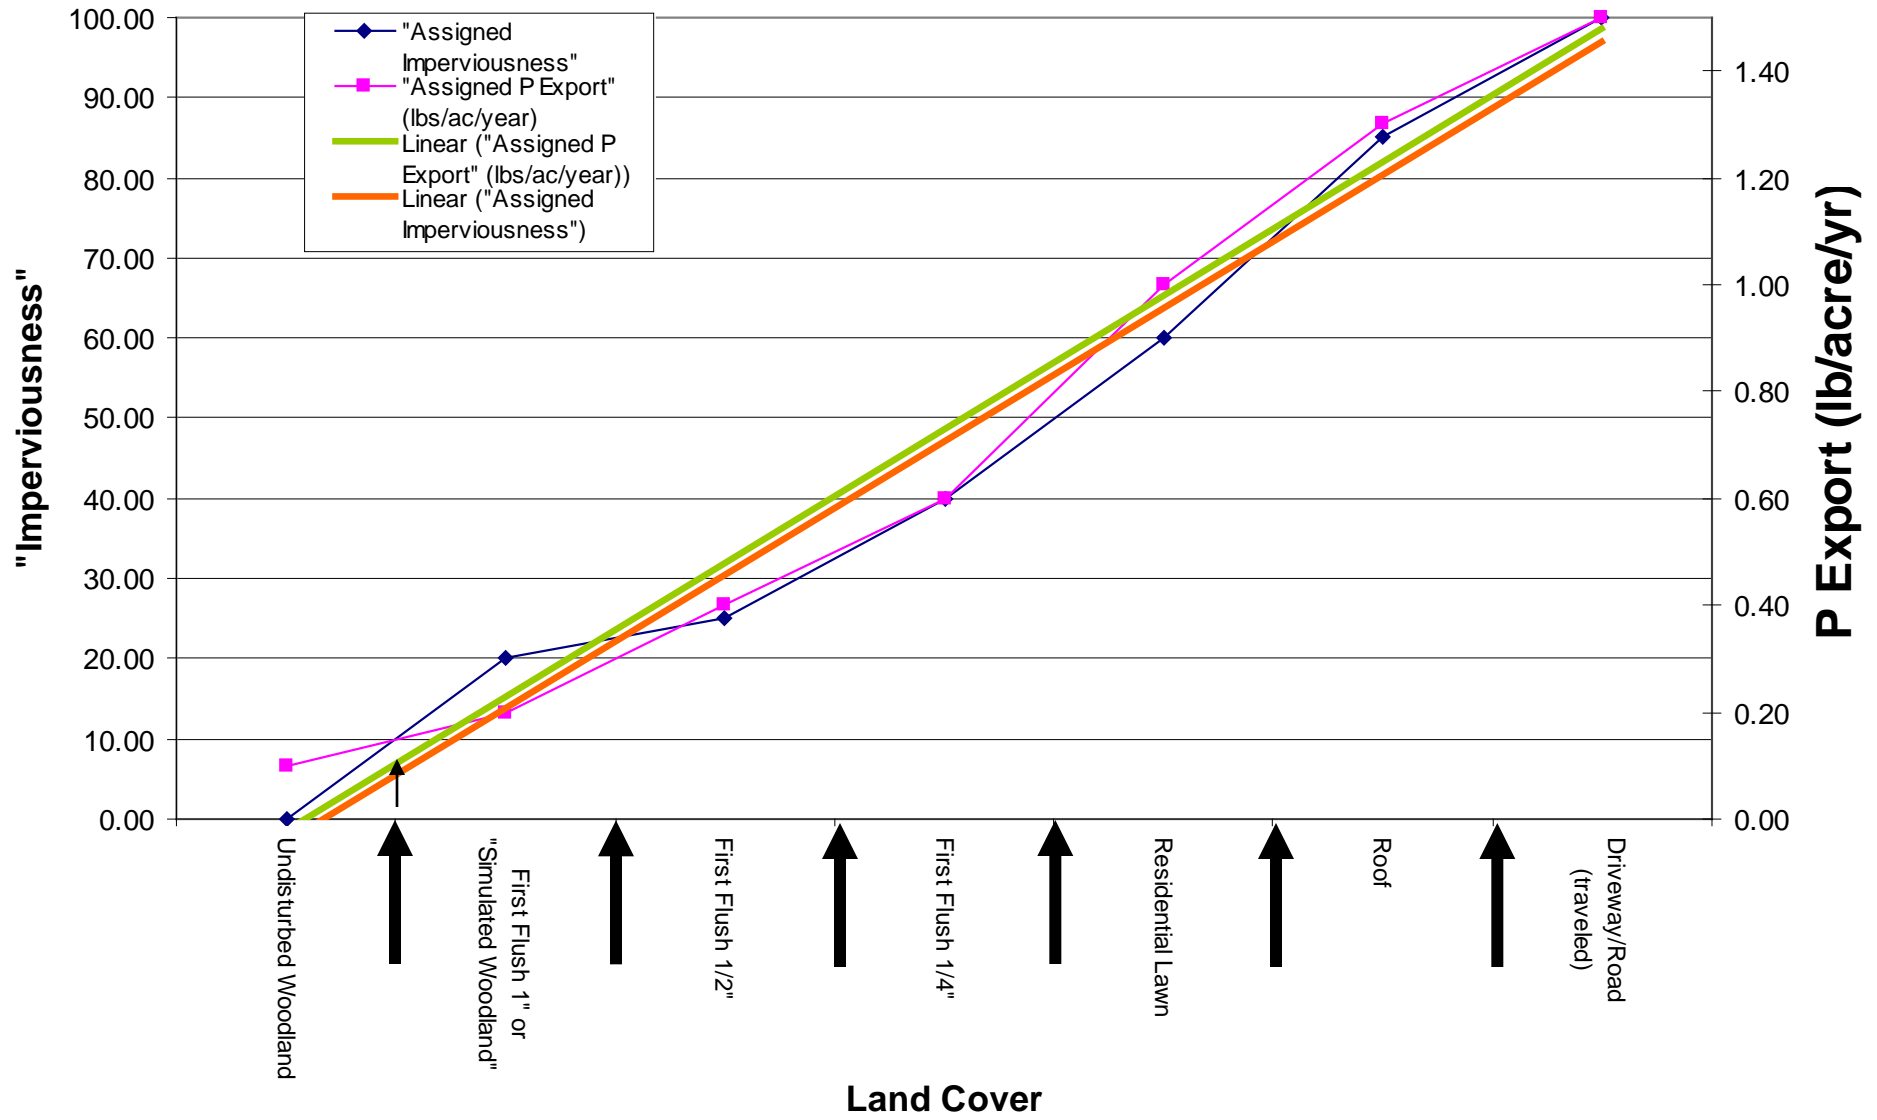

P Export : " Imperviousness"

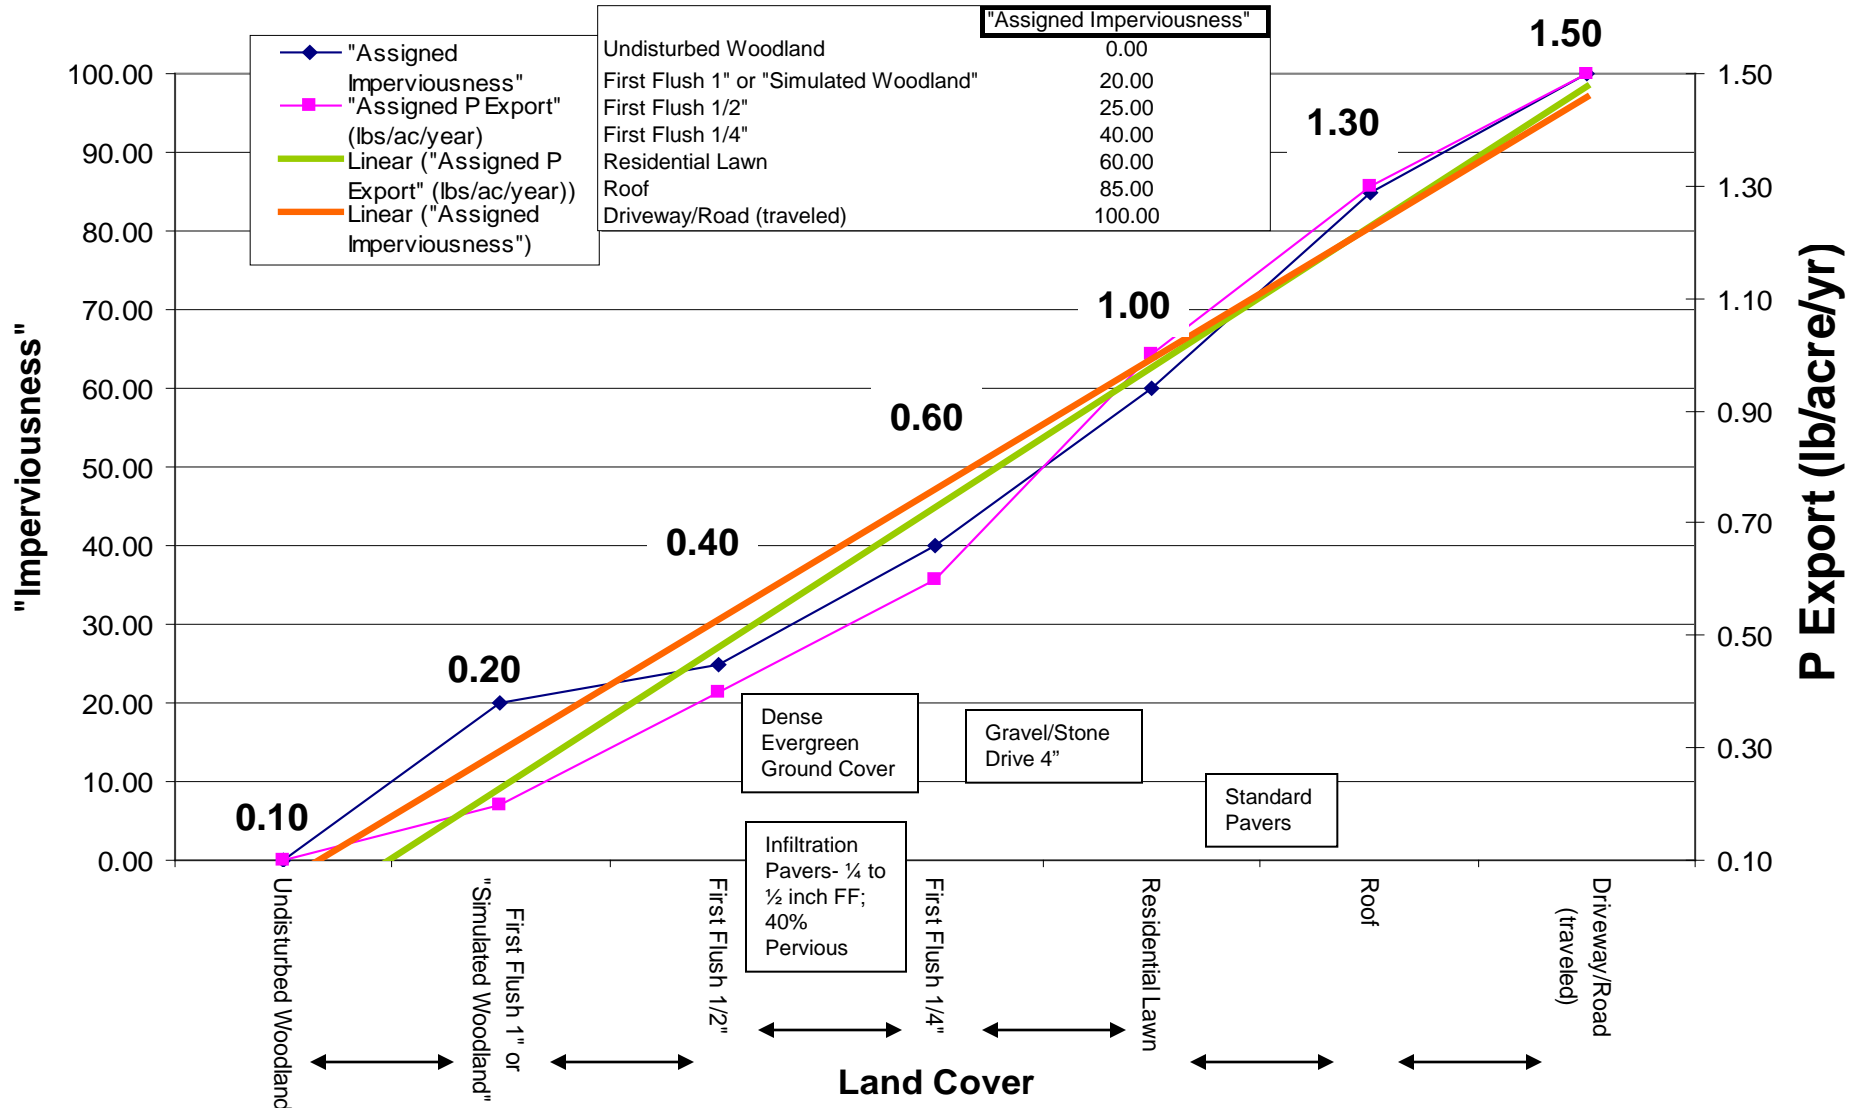

If the "estimated permeability" of a cover type is between two established cover types use these P export estimates


Recommended Septic Tank Pumping Frequency (Years)

Without Kitchen Garbage Disposal

Number of Occupants	SEPTIC TANK VOLUME (Gallons)					
	500.0	1000	1500	2000	2500	3000
1	5.0	10.0	15.0	20.0	25.0	30.0
2	2.5	5.0	7.5	10.0	12.5	15.0
3	1.7	3.3	5.0	6.7	8.3	10.0
4	1.3	2.5	3.8	5.0	6.3	7.5
5	1.0	2.0	3.0	4.0	5.0	6.0
6	0.8	1.7	2.5	3.3	4.2	5.0
7	0.7	1.4	2.1	2.9	3.6	4.3
8	0.6	1.3	1.9	2.5	3.1	3.8
9	0.6	1.1	1.7	2.2	2.8	3.3
10	0.5	1.0	1.5	2.0	2.5	3.0

Frequencies > 10 Years are not Recommended

RECOMMENDED SEPTIC TANK PUMING FREQUENCY (NO KITCHEN GARBAGE DISPOSAL)

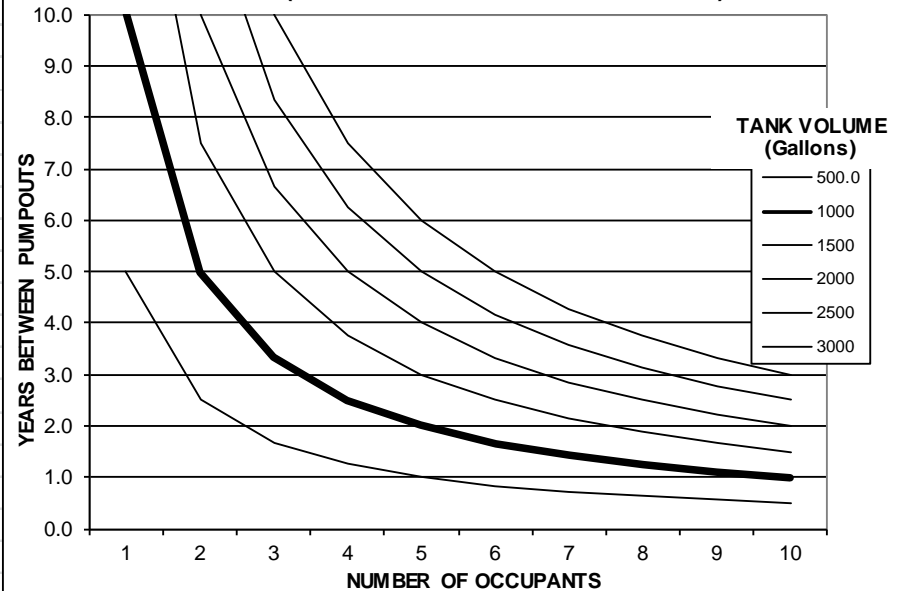

Recommended Septic Tank Pumping Frequency (Years)

With Kitchen Garbage Disposal

Number of Occupants	SEPTIC TANK VOLUME (Gallons)					
	500.0	1000	1500	2000	2500	3000
1	3.3	6.7	10.0	13.3	16.7	20.0
2	1.7	3.3	5.0	6.7	8.3	10.0
3	1.1	2.2	3.3	4.4	5.6	6.7
4	0.8	1.7	2.5	3.3	4.2	5.0
5	0.7	1.3	2.0	2.7	3.3	4.0
6	0.6	1.1	1.7	2.2	2.8	3.3
7	0.5	1.0	1.4	1.9	2.4	2.9
8	0.4	0.8	1.3	1.7	2.1	2.5
9	0.4	0.7	1.1	1.5	1.9	2.2
10	0.3	0.7	1.0	1.3	1.7	2.0

Frequencies > 10 Years are not Recommended

RECOMMENDED SEPTIC TANK PUMING FREQUENCY (WITH KITCHEN GARBAGE DISPOSAL)

